

50/80 CFM

Energy (watts)

19.2

18.2

25.2

24.4

Duct

Size

4 in

4 in

4 in

4 in

ReVent 6" Recessed Ventilation Fan with Light

Model - RVRL5080



Performance - High airflow, low sound. 50/80 CFM, <0.3/0.9 sones

LED - Adjustable 2700/3000/3500 /4000/5000K, 900L, dimmable

FEATURES

Select CFM - Choose the airflow rate (CFM) Options: 50 or 80 CFM

Quick, easy mounting clips

performance at 4" ducting

Airflow

(cfm)

50

35

80

62

Sound

(sones)

< 0.3

0.9

Static Pressure

(in wg)

0.1

0.1

0.25

0.25

Blends seamlessly with other recessed lighting

Models	RVRL5080
Exhaust Diameter	4 in (10.2 cm)
Voltage (volts)	120V
Frequency (hertz)	60Hz
Power (watts)	19.2/25.2 W
Air Flow at 0.1 CW	50/80 CFM
Noise (sones)	<0.3/0.9 Sone
LED Brightness (lumens)	900L at 4000K
LED Color Temp (kelvin)	2700, 3000, 3500, 4000, or 5000K
LED Power (watts)	13 W
Opening Size	6 in (15.2 cm)
Housing Length	8 ¹ / ₈ in (20.6 cm)
Housing Width	8 ¹ / ₈ in (20.6 cm)
Housing Depth	7 ¹ / ₈ in (18.1 cm)
	Exhaust Diameter Voltage (volts) Frequency (hertz) Power (watts) Air Flow at 0.1 CW Noise (sones) LED Brightness (lumens) LED Color Temp (kelvin) LED Power (watts) Opening Size Housing Length Housing Width

Product of GTR Technologies Inc. All rights reserved. USA and International Patents and Patents Pending See Patents at www.ReVentfans.com

1-360-876-2974 1420 Lumsden Road Port Orchard, WA 98367














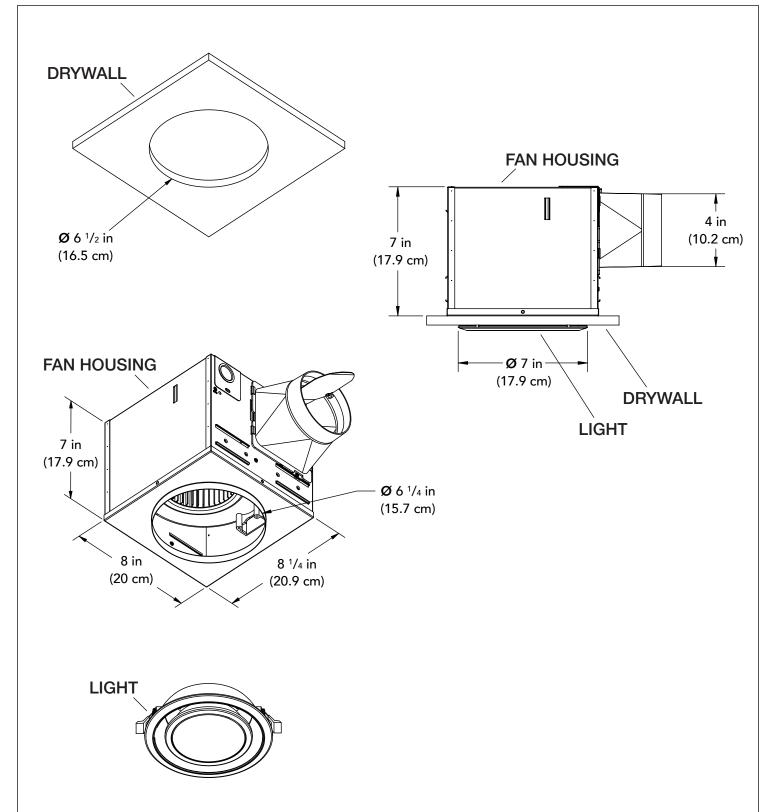

ReVent>®

THIS DRAWING IS THE PROPERTY OF GTR TECHNOLOGY INC. AND TRANSMITTED IN CONFIDENCE. THE REPRODUCTION, USE, OR DISCLOSUPE, IN WHOLE OR IN PART, OF THE DESIGN AND DETAILS CONTINUED HEREIN IS PROHIBITED WITHOUT THE WRITTEN PERMISSION OF GTR TECHNOLOGY INC.

RVRL5080